




f.a.l.
The Light Masters

www.fal.it

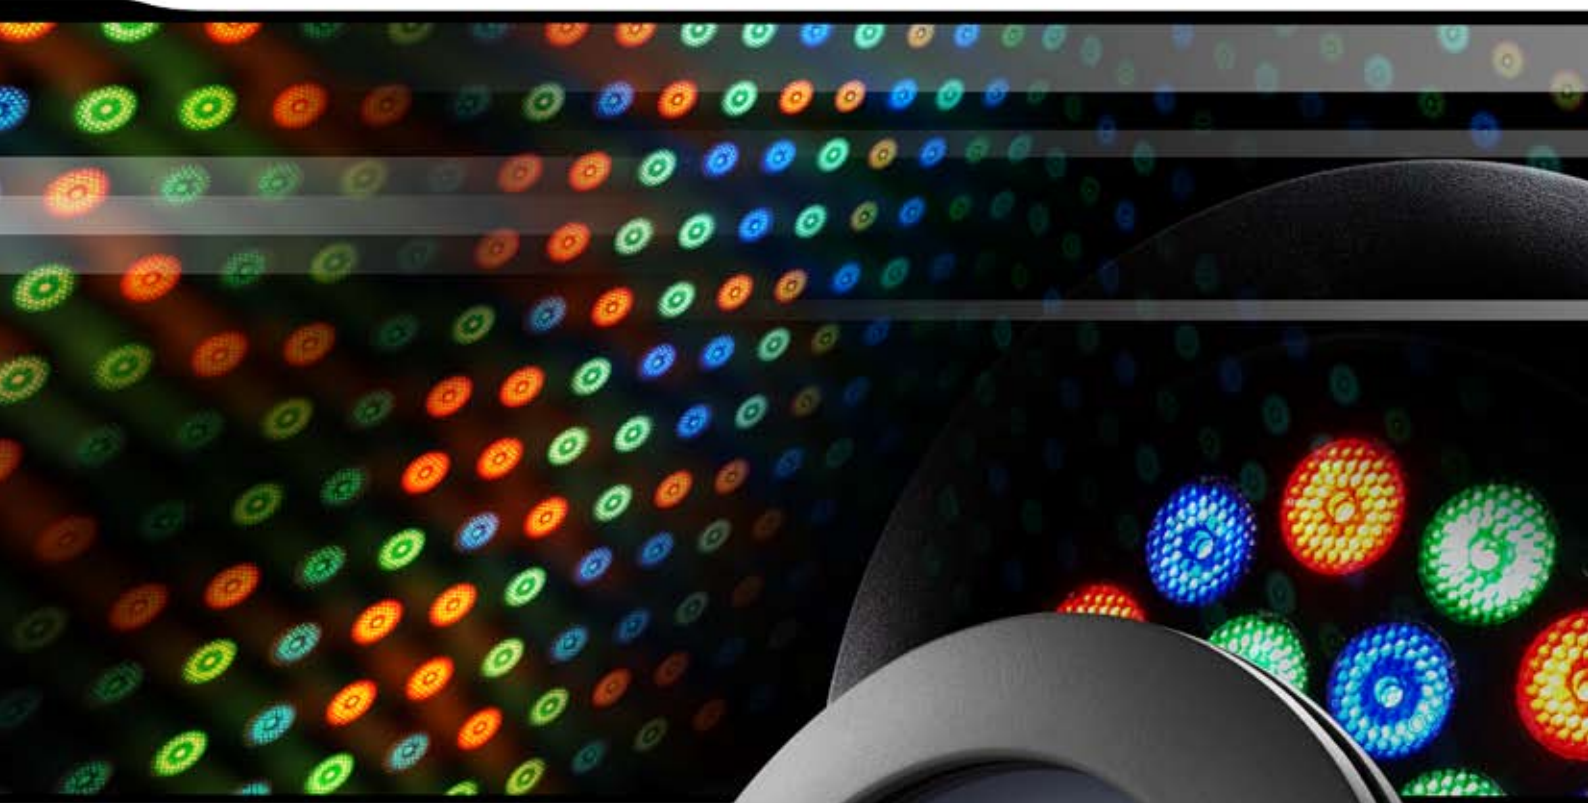

ORION II

New ORION II as pivotal role in f.a.l. Architectural Lighting series, succeeds distinctive features of its ORION18 RGB predecessor---stylish design, compact size, 18W high light output; whilst elevate link system into daisy chain, enhance auto DMX address compatibility, and full control option via f.a.l. D-CROSS.

With protection rating of IP66, ORION II is capable in both indoor and outdoor applications, such as retail shop, shopping mall, restaurant, commercial building and more.

Features


- Universal power supply
- Constant voltage/ current drive control
- Automatic recovery protection from overload, over temperature
- Automatic/ manual DMX addressing. (AUTIO ID function)





Specifications


ELECTRICAL	90 – 240V/AC, 50/60Hz 18W power consumption in full RGB Self-resetting fuse protection CE safety standards
LED SOURCE	18 * 1W R/G/B LED R/1W= 40 lum G/1W= 70 lum B/1W= 15 lum 100,000H lifespan Beam angle of 45°
OPERATIONAL FEATURES	3 channels DMX 512 standard, daisy chain link 0°C to 60°C IP66 Protection Rating Link with 60W ORION power box
PHYSICAL	Die cast aluminum body 230 * 230 * 86 (mm) 2.0kg weight

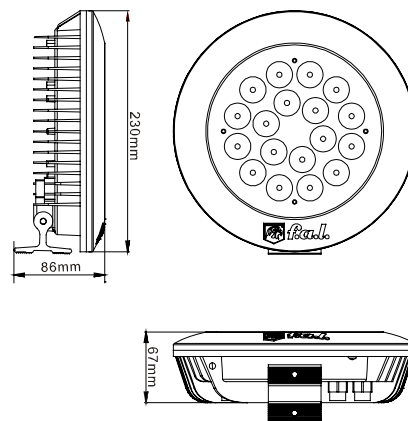


DMX Table

CHANNEL	FUNCTION
Channel 1	Red dimmer 0 - 100%
Channel 2	Green dimmer 0 - 100%
Channel 3	Blue dimmer 0 - 100%


ORION LINKING TYPE A:

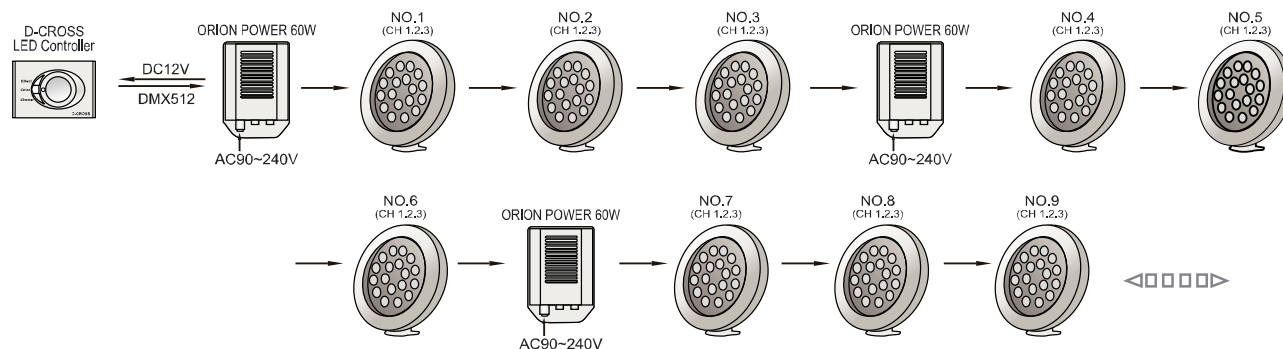

ORION LINKING TYPE B:

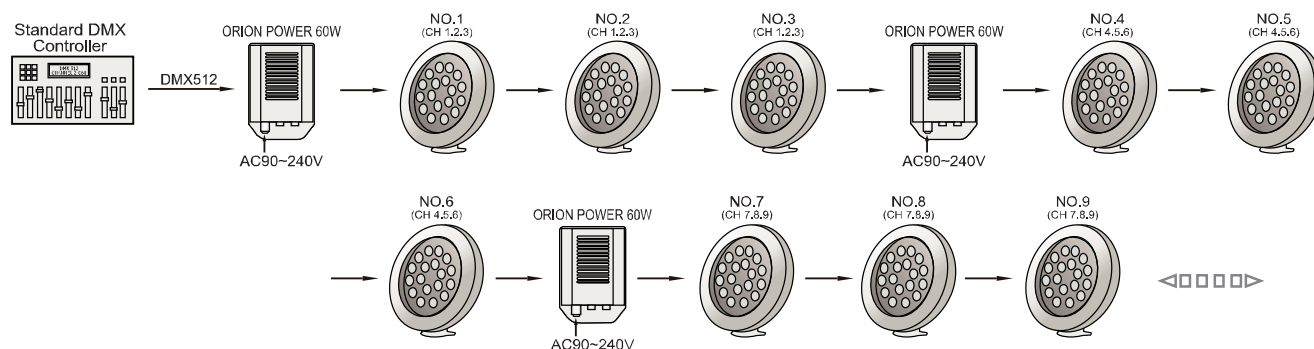

ORION LINKING TYPE C:

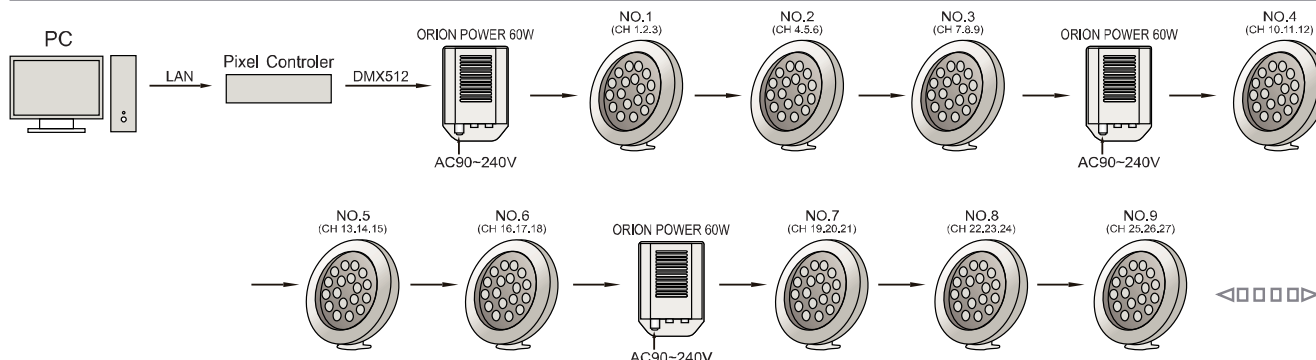

f.a.l. (China)