



f.a.l.
The Light Masters

www.fal.it



ANTARES II

The new ANTARES II, fabricated with the additional features of its ANTARES 18 RGB predecessor, aims to convey ease of use with its auto DMX address compatibility, and full control option via f.a.l. D-CROSS.

It also features 25° and 50° optional beam angle which add to its movement options whilst producing exceptional LED effects in any type of setting.

With its IP66 rating, ANTARES II is suitable for both indoor and outdoor applications. The stylish design and compact size make it easy to fit into decoration of retail shop, shopping mall, restaurant, commercial building and more.



Features


- Universal power supply
- Constant voltage/ current drive control
- Automatic recovery protection from overload, over temperature
- Automatic DMX addressing. (AUTIO ID function)

Specifications



ELECTRICAL	110/220V, 50/60Hz 18W power consumption in full RGB Self-resetting fuse protection CE safety standards
LED SOURCE	18 x 1W R/G/B LED 100,000H lifespan Optional beam angle of 50°
OPERATIONAL FEATURES	3 channels DMX 512 standard, daisy chain link 0°C to 60°C IP66 Protection Rating
PHYCICAL	Die cast aluminum body 400 x 55 x 108 (mm) 2.3kg weight

DMX Table

CHANNEL	FUNCTION
Channel 1	Red dimmer 0 - 100%
Channel 2	Green dimmer 0 - 100%
Channel 3	Blue dimmer 0 - 100%

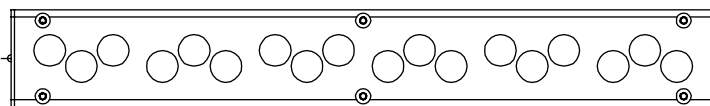

400mm

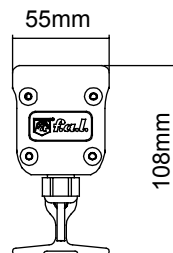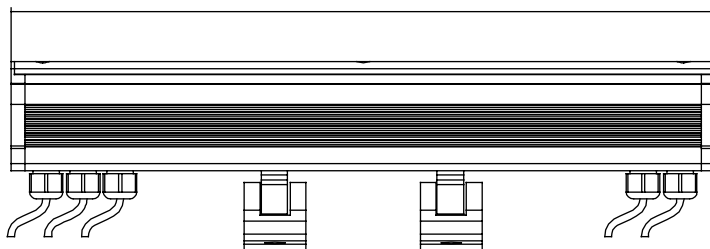

55mm

108mm

f.a.l. (China)

Sanecore Science & Technology Industry Park, Jiuwei Village, XiXiang Town, ShenZhen, China 518102
Tel:+86 755 2748 3618 Fax:+86 755 2997 5508 E-mail: fal@iagmacao.com Website: www.fal.it